



Integrated with Complete Security Solutions Designed for Remote Office and SOHO

- ZyNOS ICSA IPsec VPN and FIREWALL Certified
- Web-based Content Filtering with Blue Coat service
- Policy-based Bandwidth Management
- Dial Backup with RS-232 on RJ-45 Null Modem Port
- Four LAN/DMZ*10/100 auto MDI/MDIX Ethernet Ports
- 24Mbps throughput handling With Firewall On and Active VPN tunnel for FTTH and ADSL2+



Internet Security
Appliance

ZYWALL 2
PLUS

Benefits

Virtual Private Network (VPN) Connection

The ZyWALL 2 Plus supports IPsec VPN suitable for remote site to central server deployment and home to office or office to home deployments. Data encryption over the Internet ensures secure transmission between the two sites eliminating the need for expensive leased lines, and enabling global interconnectivity at a minimal expense. With the Redundant IPsec VPN feature, the ZyWALL 2 Plus can establish back-up tunnels to main sites.

Secured Firewall Protection and Blue Coat

The ZyNOS ICSA Firewall certified ZyWALL 2 Plus provides robust firewall protection, based on Stateful Packet Inspection (SPI) and Denial of Service (DoS) technology. The ZyWALL 2 Plus provides the first line of defense against hackers, and other malicious threats. Blue Coat subscription services assist in keeping spyware, malware and phishing exploits from attacking your PCs, and help protect business and family from illegal and unwanted surfing.

Maximum Bandwidth Provision

The ZyWALL 2 Plus maximizes bandwidth utilization based on IP addresses and/or application types. Designed to ensure critical applications, services and specified users have the right amount of bandwidth when required.

Traffic Redirection for Broadband Backup Connection

The ZyWALL 2 Plus increases reliability by supporting Fail-Over and Fail-Back technologies. User Selected back-up ISDN or Analog modem connections automatically switch traffic back to the WAN Port, when the primary connection is re-established. The ZyWALL 2 Plus backup feature ensures access to the net while decreasing the likelihood of potential down times and associated operation losses.

Secure Zones Technology*

With the enhanced DMZ* zone, SOHO can easily deploy their access server or WIFI appliance separate from the trusted local network (LAN). The DMZ* zone has its own DHCP service and all zones are securely separated by firewall rules.

Specifications

Mode of Operation

- Routing Mode
- Transparent Mode (Bridge)
- NAT (Network Address Translation)
- Dial Backup

Virtual Private Network

- 2 (5)* simultaneous IPSec VPN Connections
- DES/3DES/AES encryption
- Manual Key, IKE and PKI (X.509)
- IPSec NAT Traversal
- Xauth User Authentication
- Redundant VPN connection (VPN HA)

Firewall Security

- Transparent Firewall (Bridge mode)
- Stateful Packet Inspection
- DoS and DDoS Protection
- Real-time Attack Alert and Logs

Content Filtering

- Java/ActiveX/Cookie/Proxy Blocking
- URL and Key word Blocking
- Web Content Filtering

Network

- DHCP client/server/relay
- PPPoE
- PPTP

System Management

- Web GUI (HTTP, HTTPS)
- Command Line Interface (Console, Telnet, SSH)
- Firmware Upgrade (Web GUI, TFTP/FTP/SFTP)
- Vantage Centralized Network Management*

Hardware Specifications

- Status LED Indicator: PWR, ACT, LAN 1~4, WAN
- Power adapter: 12VDC
- Console: RS-232 on RJ-45 Port
- Dial Backup: RS-232 on RJ-45 Null Modem Port

- Reset Button: Yes
- LAN/DMZ*: 4-port switch, 10/100Mbps Auto MDI/MDIX
- WAN: 10/100Mbps Auto MDI/MDIX

Physical Specifications

- Dimensions: 181 (W) x 128 (D) x 36 (H) mm
- Weight: 304g

Environmental Specifications


- Operating Temperature: 0°C ~ 50°C
- Operating Humidity: 20% ~ 95% (non-condensing)

Certification

- EMC: FCC Part 15 Class B, CE-EMC Class B, C-Tick Class B, VCCI Class B
- Safety: CSA International, CE EN60950-1 (UL60950-1, CSA60950-1, EN60950-1, IEC60950-1)
- Green Product and WEEE comply with

* Firmware upgradeable for future enhancement

Application Diagram

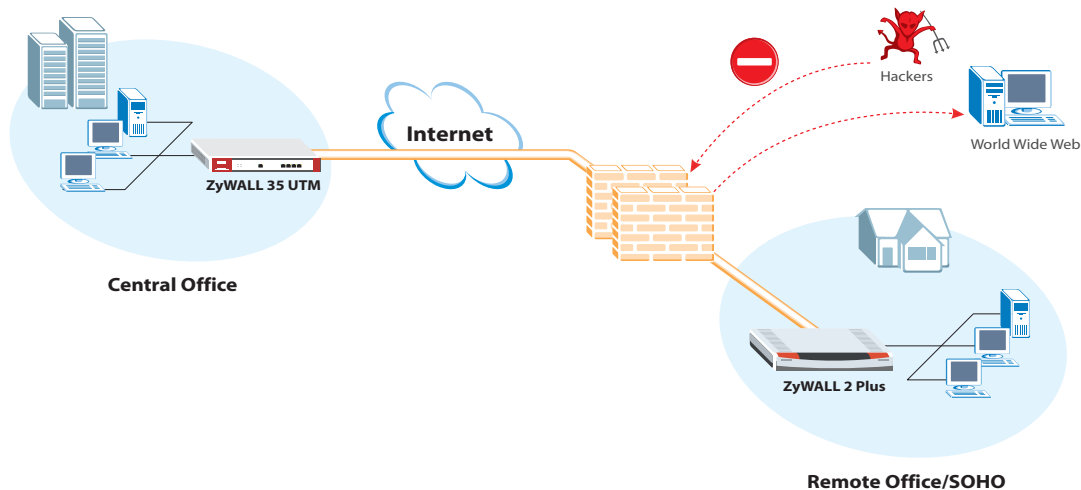

For more product information, visit us on the web www.ZyXEL.com

Corporate Headquarters
ZyXEL Communications Corp.
 Tel: +886-3-578-3942
 Fax: +886-3-578-2439
 Email: sales@zyxel.com.tw
<http://www.zyxel.com>

ZyXEL Denmark A/S
 Tel: +45 39 55 07 00
 Fax: +45 39 55 07 07
 Email: sales@zyxel.dk
<http://www.zyxel.dk>

ZyXEL France SARL
 Tel: +33 (0)4 72 52 97 97
 Fax: +33 (0)4 72 52 19 20
 Email: info@zyxel.fr
<http://www.zyxel.fr>

ZyXEL Hungary
 Tel: +36-1-336-1646
 Fax: +36-1-325-9100
 Email: info@zyxel.hu
<http://www.zyxel.hu>

ZyXEL North America
 Tel: +1-714-632-0882
 Fax: +1-714-632-0858
 Email: sales@zyxel.com
<http://www.us.zyxel.com>

ZyXEL Poland
 Tel: +48225286603
 Fax: +48225206701
 Email: info@pl.zyxel.com
<http://www.pl.zyxel.com>

ZyXEL Spain
 Tel: +34 902 195 420
 Fax: +34 913 005 345
 Email: sales@zyxel.es
<http://www.zyxel.es>

ZyXEL UK Ltd.
 Tel: +44 (0) 1344 303044
 Fax: +44 (0) 1344 303034
 Email: sales@zyxel.co.uk
<http://www.zyxel.co.uk>

ZyXEL Czech s.r.o.
 Tel: +420 241 091 350
 Fax: +420 241 091 359
 Email: info@zyxel.cz
<http://www.zyxel.cz>

ZyXEL Finland Oy
 Tel: +358-9-4780 8400
 Fax: +358-9-4780 8448
 Email: sales@zyxel.fi
<http://www.zyxel.fi>

ZyXEL Germany GmbH.
 Tel: +49 (0) 2405-6909 0
 Fax: +49 (0) 2405-6909 99
 Email: sales@zyxel.de
<http://www.zyxel.de>

ZyXEL Kazakhstan
 Tel: +7-327-2-590-699
 Fax: +7-327-2-590-689
 Email: sales@zyxel.kz
<http://www.zyxel.kz>

ZyXEL Norway A/S
 Tel: +47 22 80 61 80
 Fax: +47 22 80 61 81
 Email: sales@zyxel.no
<http://www.zyxel.no>

ZyXEL Russia
 Tel: +7 (095) 542-8920
 Fax: +7 (095) 542-8925
 Email: info@zyxel.ru
<http://www.zyxel.ru>

ZyXEL Sweden A/S
 Tel: +46 (0) 31 744 77 00
 Fax: +46 (0) 31 744 77 01
 Email: sales@zyxel.se
<http://www.zyxel.se>

ZyXEL Ukraine
 Tel: +380 44 494 49 31
 Fax: +380 44 494 49 32
 Email: sales@ua.zyxel.com
<http://www.ua.zyxel.com>



Copyright © 2006 ZyXEL Communications Corp. All rights reserved. ZyXEL, ZyXEL logo and ZyNOS are registered trademarks of ZyXEL Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.